



# Plastomer/Elastomer

# Queo™ 0201FX

Octene-1 Plastomer

## Description

**Queo 0201FX** is an ethylene based octene-1 plastomer, produced in a solution polymerisation process using a metallocene catalyst.

**CAS-No.** 26221-73-8

## Applications

**Queo 0201FX** is intended for use as primary blend partner in high performance seal layers with an additive package designed to offer improved control of the coefficient of friction of coextruded blown films. Demonstrated applications include:

High strength flexible films	High speed FFS films
Laminated structures requiring very high seal integrity	Seal layers in food barrier films

## Additives

**Queo 0201FX** contains anti block agent, slip agent, processing aid and stabilizers

## Special Features

**Queo 0201FX** is optimised to deliver:

Versatile blending with other polyolefins in film, extrusion and moulding applications.	Outstanding toughness
Unrivalled sealing and hot tack properties at low temperature	Outstanding puncture resistance
Low Coefficient of Friction (C.O.F.) and improved C.O.F. consistency	Low temperature impact strength
	High clarity

## Physical Properties

Property	Typical Value	Test Method
<small>Data should not be used for specification work</small>		
Density (23 °C)	902 kg/m <sup>3</sup>	ISO 1183
Melt Flow Rate (190 °C/2,16 kg)	1,1 g/10min	ISO 1133
Flexural Modulus <sup>1</sup>	68 MPa	ISO 178
Tensile Modulus	60 MPa	ASTM D 882-A
Tensile Strength <sup>1</sup>	33 MPa	ISO 527-2
Elongation at Break <sup>1</sup>	710 %	ISO 527-2
Melting temperature (DSC)	95 °C	ISO 11357-3
Seal Initiation Temperature	78 °C	ASTM F88
Vicat softening temperature (10 N)	80 °C	ISO 306
Brittleness temperature	< -90 °C	ASTM D 746
Environmental Stress Crack Resistance ( ) <sup>1</sup>	> 1.000 h	ASTM D 1693-B
Izod Impact Strength, notched (23 °C) <sup>1</sup>	No break	ISO 180/1A
Hardness, Shore D	38	ISO 868

<sup>1</sup> Measured on moulded plaques.

Queo is a trademark of the Borealis group.

Borealis AG | Wagramer Strasse 17-19 | 1220 Vienna | Austria  
 Telephone +43 1 224 00 0 | Fax +43 1 22 400 333  
 FN 269858a | CCC Commercial Court of Vienna | Website [www.borealisgroup.com](http://www.borealisgroup.com)


**Plastomer/Elastomer**  
**Queo 0201FX**

**Film Properties**

Property	Typical Value	Test Method
Dart Drop <sup>1</sup>	> 28 g/μm	ASTM D1709
Puncture resistance	650 mJ/mm	Borealis Method
Haze	4 %	ASTM D 1003
Gloss (45 °C)	78	ASTM D 2457

Data should not be used for specification work

<sup>1</sup> Blown film Monsanto dart

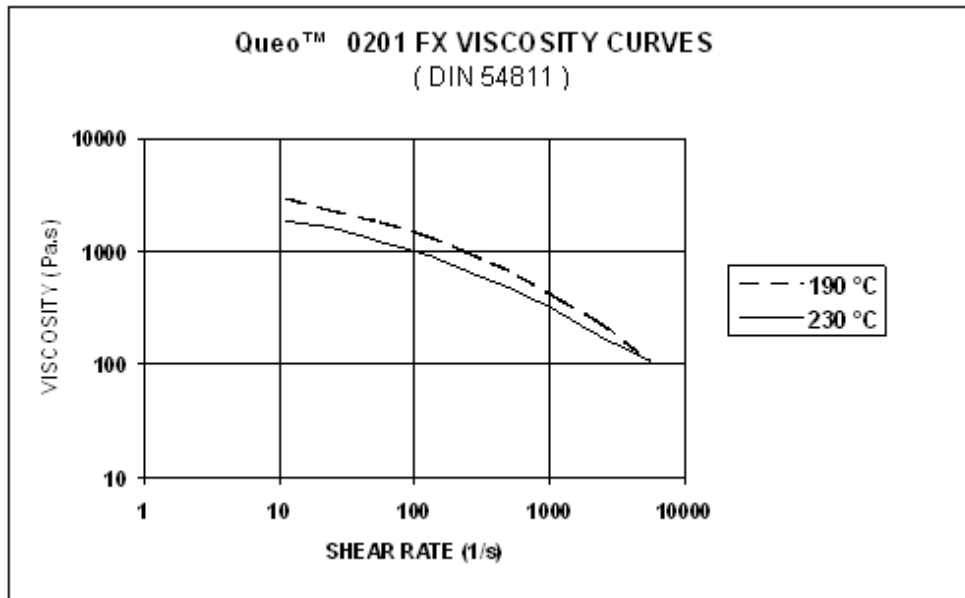



# Plastomer/Elastomer

## Queo 0201FX

### Storage

**Queo 0201FX** This polymer, like most polymers, is combustible so the usual precautions concerning ignition sources should be taken in warehouses and storage rooms. Where large quantities are kept in store, it is necessary to observe the normal rules for orderly stock control and it is recommended to use the first in – first out (FIFO) principle for stock planning. The products should be stored in a dry and clean facility to prevent contamination and not be exposed to direct sunlight as this may lead to quality deterioration. These materials have a shelf life of at least 3 (three) years after date of production, provided the material remains in its original unopened packaging and are stored under the storage conditions as described in this document. "Shelf life" means that there will not be any substantial difference compared to the agreed specification. The date of batch creation can be derived from the batch code printed on the bags representing, YYMMDDHLL (LL being two letters with no reference to the production time). Borealis Plastomers generally does not sell prime material older than 2 (two) years unannounced.

### Related Documents

The following related documents are available on request, and represent various aspects on the usability, safety, recovery and disposal of the product.

"Safety data sheet" / "Product safety information sheet"

Statement on chemicals, regulations and standards

General statement on compliance to food contact regulations

Statement on polymer additives and BSE

### Disclaimer

**The product(s) mentioned herein are not intended to be used for medical, pharmaceutical or healthcare applications and we do not support their use for such applications.**

To the best of our knowledge, the information contained herein is accurate and reliable as of the date of publication; however we do not assume any liability whatsoever for the accuracy and completeness of such information.

**Borealis makes no warranties which extend beyond the description contained herein. Nothing herein shall constitute any warranty of merchantability or fitness for a particular purpose.**

**It is the customer's responsibility to inspect and test our products in order to satisfy itself as to the suitability of the products for the customer's particular purpose. The customer is responsible for the appropriate, safe and legal use, processing and handling of our products.**

No liability can be accepted in respect of the use of any Borealis product in conjunction with any other products and/or materials. The information contained herein relates exclusively to our products when not used in conjunction with any other material unless as specifically provided for in the test methods stated above.